

# PERFORMANCE BULLETIN

**Engine:** Yamaha VF200LA

**Boat:** Nautic Star® 224 XTS

**Configuration:** Single


**Test Date:** 8-Jul-2014



## PERFORMANCE DATA

RPM	MPH	GPH	MPG
1000	5.7	1.4	4.07
1500	7	2.3	3.04
2000	7.7	3.4	2.27
2500	10.4	5	2.08
3000	21	6.1	3.44
<b>3500</b>	<b>32.2</b>	<b>8.2</b>	<b>3.93</b>
4000	37.8	11.2	3.38
4500	43.5	13.9	3.13
5000	49.4	15.6	3.17
5500	53.8	18.4	2.92
<b>5950</b>	<b>56.4</b>	<b>19.2</b>	<b>2.94</b>

**0-30 MPH: 5.42**

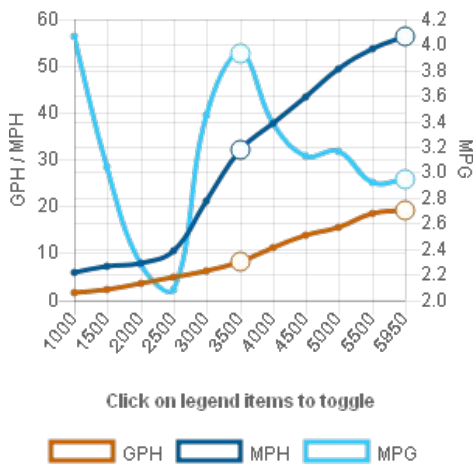

### NOTICE TO CONSUMER

The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Please also keep in mind that the data contained in this Performance Bulletin may or may not have been performed using Yamaha PowerMatched components. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



## NAUTIC STAR® 224 XTS

Length	22' 6"
Beam	8' 6"
Dry Weight (Boat Mfr. Pub)	2,100 lbs
Maximum HP	250 hp
Fuel Capacity	63 gal
Weight as Tested	3,367 lbs

## VF200LA

Horsepower	200 hp
Induction	EFI
Displacement	4.2 L
Weight (Estimated)	505 lbs
Gear Ratio	1.75

## ENGINE MOUNTING HEIGHT

Mounting Hole Position	#2 on Hydraulic Jack Plate
Ventilation Plate Height	3 1/2" Above Boat Bottom (Plate Set at 1.5)

## PROPELLER(S)

Series	Pro™ Series
Diameter x Pitch	14 1/2" x 21
Yamaha Part #	6J9-45976-10-00
Propeller Material	Polished Stainless Steel

## TEST CONDITIONS

Number of People	2
Air / Water Temperature (Fahrenheit)	90° F / 78° F
Elevation (in feet above sea level)	244'
Wind Velocity	0-5 MPH

## COMMENTS

Test weight includes 1/2 tank of fuel, 1 battery, bow-mounted trolling motor, 10" hydraulic jack plate, safety and test gear.

**YPB#:** PB\_NST\_224XTS\_VF200LA\_2014-07-08\_BAY

### Boat Manufactured By:

Nautic Star  
P.O. Box 26 • Amory, MS 38821  
(662) 256-5636

[www.nauticstarboats.com](http://www.nauticstarboats.com)

(<http://www.nauticstarboats.com>)

